




OCTG · API 5CT · WELLBORE

Casing (API 5CT)

Steel casing for lining and protecting oil and gas wellbores. OD 4-1/2" to 20", grades J55 to Q125 and 13Cr, with BTC, LTC, STC and premium connections.

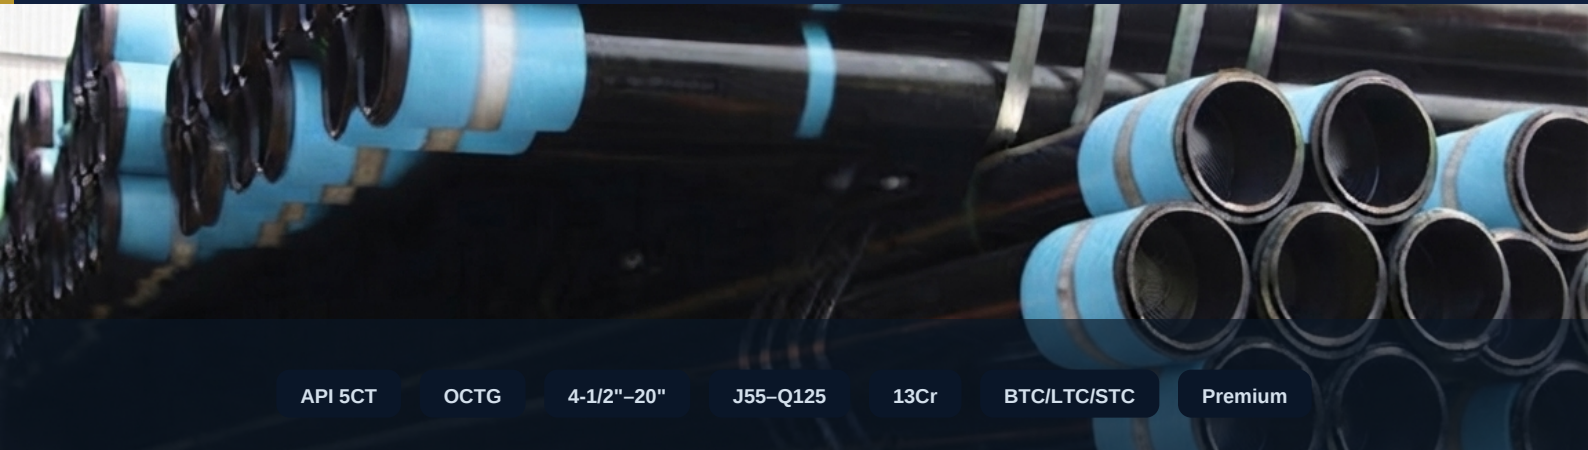

API 5CT

OCTG

4-1/2"–20"

J55–Q125

13Cr

BTC/LTC/STC

Premium

PRODUCT OVERVIEW

API 5CT casing is used to line oil and gas wellbores and protect the production string. It holds the drill string in place and prevents unstable upper formations from collapsing. IPC supplies casing from internationally certified manufacturers with full API 5CT compliance.

Available in grades from J55 for standard service to Q125 and 13Cr for high-pressure, corrosive, and HPHT environments. Connections include BTC, LTC, STC and proprietary semi-premium / premium options. Supplied with plastic end caps and transport supports.

TECHNICAL SPECIFICATIONS

Product	Wellbore casing — API 5CT, OCTG
Use	Line & protect wellbore, support drill string
OD	4-1/2" – 20"
Wall Thickness	5 – 16 mm
Length	R2: 7.62–10.36 m / R3: 10.36–14.63 m
Grades	J55, K55, N80, N80-Q, L80, C90, T95, P110, Q125, 13Cr
Connections	BTC, LTC, STC, Semi-Premium, Premium (Intrepid-SP / Intrepid-M)
Sour Service	C90, T95, 13Cr available
Protection	Plastic end caps, transport support frames

KEY FEATURES

- Full range API 5CT grades J55 to Q125
- 13Cr grade for corrosive environments
- OD 4-1/2" to 20"
- BTC, LTC, STC and premium connections
- R2 and R3 lengths
- Sour service grades: C90, T95
- HPHT qualified grades available

APPLICATIONS

- Oil & gas production wells
- Surface, intermediate and production casing
- Sour gas wells (H2S service)
- High-pressure, high-temperature (HPHT) wells
- CO2 injection wells (13Cr)

MANUFACTURER / SUPPLIER

Interpipe (Ukraine) · Certified API 5CT mills

REQUEST A QUOTE

IPC CORPORATION

Pipeline · Tube · Industrial Solutions
www.ipc-corporation.com
info@ipc-corporation.com

CONTACT

USA: +1 (645) 237-7525
Colombia: +57 317 624 0319

REQUEST A QUOTE

info@ipc-corporation.com

© 2025 IPC Corporation. All rights reserved.

